



FROZEN CARBONATED BEVERAGE DISPENSER MODEL: 774 SD (60Hz)

SPECIFICATIONS

AIR COOLED

DIMENSIONS

DISPENSER

Width: 26" (660 mm)
Depth: 32.5" (826 mm)
Height: 34" (864 mm)

WEIGHT

Empty: 418 lbs (190 kg)
Operating: 464 lbs (211 kg)

CLEARANCE REQUIREMENTS

Sides or Back: 3 in. (76 mm) Minimum
Top: 12 in. (304 mm) Minimum with Side or Back Open-Air Conditions
36 in. (914 mm) Minimum in Equipment Alcove

CAPACITY

Barrel Volume: 176 oz
Continuous Draw (alternating barrels): 5,160 oz/hour
Recovery Time (75°F ambient): 4 Minutes

REFRIGERATION

19,000 BTU/Hr, R-404A (60 Hz)

SYRUP

(4) FCB Base Syrup Flavors
Bag-In-Box (BIB) syrup and connections

MOTORS

Beater: (4) 1/6 HP (120 w)
Fan: 1/4 HP (135 w)

WATER REQUIREMENTS

Fresh Water, Minimum 3/8" Supply, 30 psi Flowing (207 kPa) Water Flow Rate: 1.5 oz/sec from Solution Module

CO₂


Supply pressure: 70-72 psig (482.6 - 496.4 kPa)

ELECTRICAL REQUIREMENTS

208-254 VAC Single Phase, 3 Wire, 30 Amp
Uses NEMA #L-630R Receptacle (60 Hz)
buck-boost transformer required for operation outside this range.

GRAPHICS

Duratrans: 10 in x 25 7/8 in (254 mm x 657 mm)
Flavor Card: 4 7/8 in x 3 1/2 in (124 mm x 89 mm)

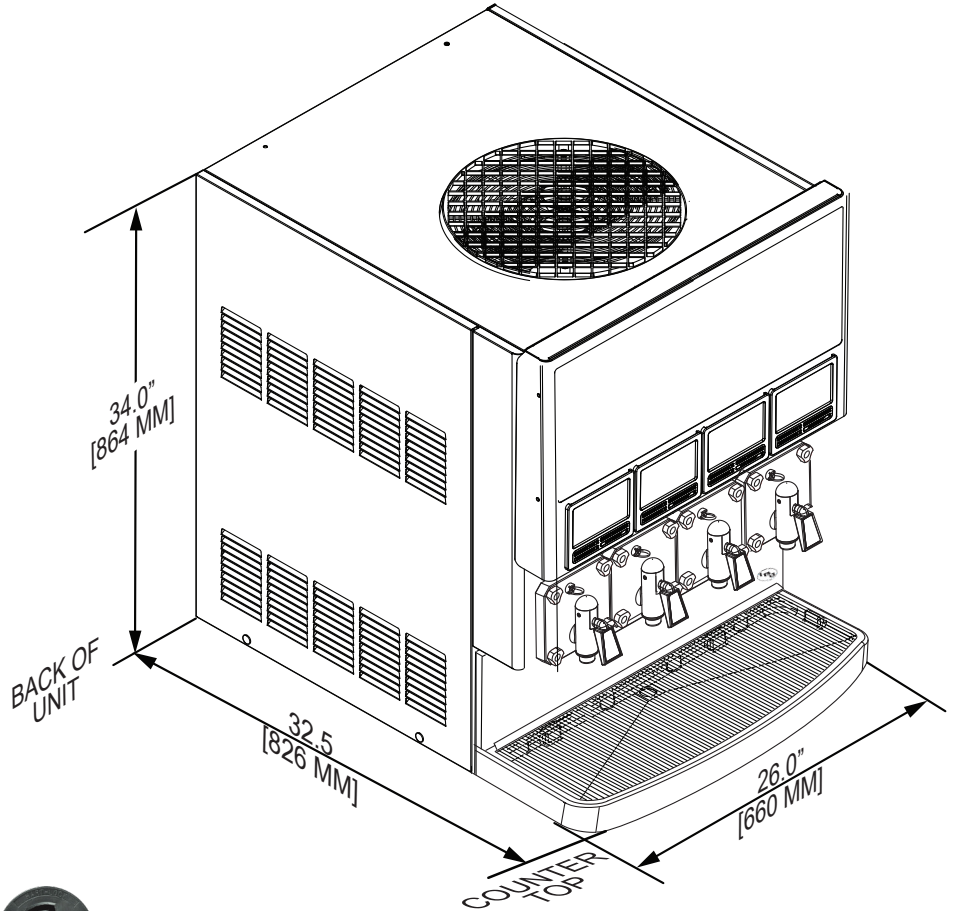

NEMA L6-30R

