



FROZEN CARBONATED BEVERAGE DISPENSER

MODEL: VIPER™ ELITE RED HIGH OUTPUT 3B

SPECIFICATIONS

DIMENSIONS

DISPENSER

Width: 22.75" (577.85 mm)
 Depth: 32.5" (825.5 mm)
 Height: 43.7" (1110 mm) (Tall Merchandiser)
 Height: 37" (940 mm) (Short Merchandiser)
 Graphic Panel: 22.5" W x 18.75" H (Tall Merchandiser)
 22.5" W x 11.79" H (Short Merchandiser)
 Flavor Cards: 6.5" W x 4" H

BASE CART (optional)

Width: 22.75" (577.85 mm)
 Depth: 32.5" (825.5 mm)
 Height: 32" (812.8mm)

WEIGHT

DISPENSER

Shipping Weight: 465 lbs (211 kg)

BASE CART

Shipping Weight: 175 lbs (79 kg)

CLEARANCE REQUIREMENTS

TOP: 12"
 EACH SIDE: 2" OR BACK: 2"

CAPACITY

75-82 oz/min. continuous, alternating barrels @ 75°F ambient

REFRIGERATION

19,000 BTU/Hr, R-404A

SYRUP

(3) FCB Base Syrup
 Bag-In-Box (BIB) Syrup and connections

WATER REQUIREMENTS

Water = 25 min. psig dynamic. Min 3/8" I.D. Line

CO₂

Supply pressure: 75 psig (482.6 - 496.4 kPa)
 Minimum 3/8" supply line

ELECTRICAL REQUIREMENTS


230V +/- 15V 60Hz, 30a, single phase
 230V +/- 15V 50HZ, 30a, single phase
 (includes 8ft. power cord NEMA L6-30P molded plug connection)



NEMA L6-30R

60Hz cUL_{us} LISTED NSF CE

50Hz NSF CE

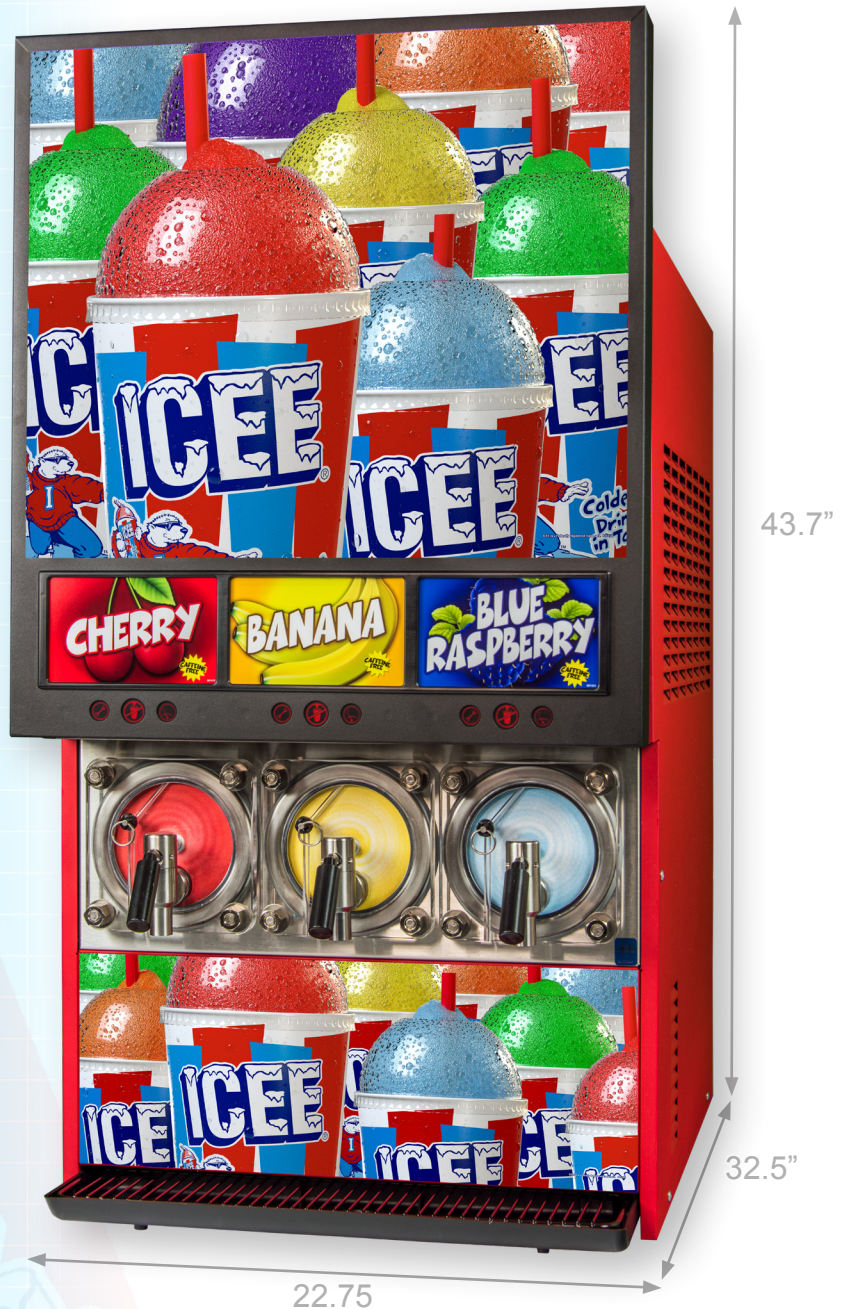

FEATURES AND BENEFITS

- The Highest Capacity and Quality in the Industry
- Intelligent Defrost™
- User Friendly System Controls on Large LCD Screen
- LED Lighted Merchandiser and Flavor Cards
- Individual Flavor Barrel adjustability

